
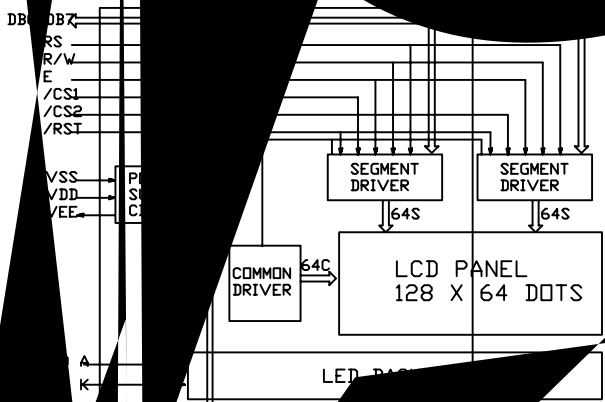


Outline D

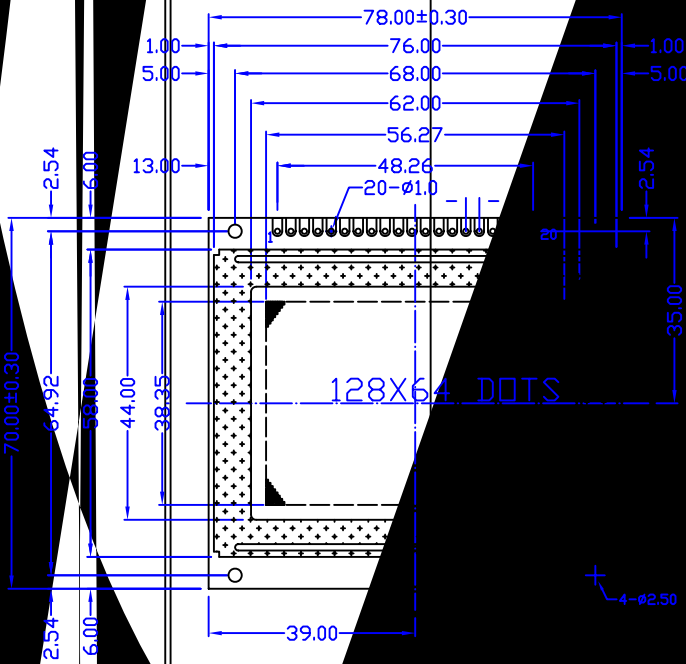

- OV AND 3.0V AVAILABLE
- 3. LCD TYPE: Y/G STN
- 4. BACKLIGHT: BOTTOM LED BACKLIGHT
- 5. COLOUR OF BACKLIGHT: Y/G
- 6. 1/64 DUTY CYCLE, 1/9 BIAS
- 7. VIEWING ANGLE: 6 O'CLOCK
- 8. TEMPERATURE RANGE: NORMAL(0--50)EXTENDED
- 9. LOW CONSUMPTION, LOW VOLTAGE, HIGH CONTRAST

Pin Assignment

CHIP SELECT OF IC2 (LOW EFFICIENCY)

Electrical

ITEM	SYMBOL	MIN	TYP	MAX	UNIT
VOLTAGE FOR LOGIC	VDD-VSS	4.75	5.0	5.25	V
SUPPLY CURRENT	I _{DD}	-	12.0	-	mA
	I _{OC}	-	16.0	-	V
LCD OPERATING	I _{DD} (VDD=V0)	-	15.0	-	V

NOTED: ⊕